SZBC-130

Warranty:

♦ 5 years Manufacturer Warranty

♦ Warranty on Electrical Performan: 10 years 90%, 25 years 80% of power output.

Manufacturing:

♦ Original cell sorting system ensures the best electric cell match

♦ EL-Testing before packing

♦ Comprehensive module power testing

Performace:

♦ Adopting LONGI HPBC solar cells with zero-bus-bar, offering a sleek appearance and higher efficiency.

♦ Stable output in low light .

♦ Intergraded bypass diodes for each cell is not only fireproof ensuring the continuous output even part of the cells are damaged.

♦ Original module technology increased the efficiency by 3% compared to traditional fullblack modules.

♦ Ideal for balconies, RVs, and BIPV applications.

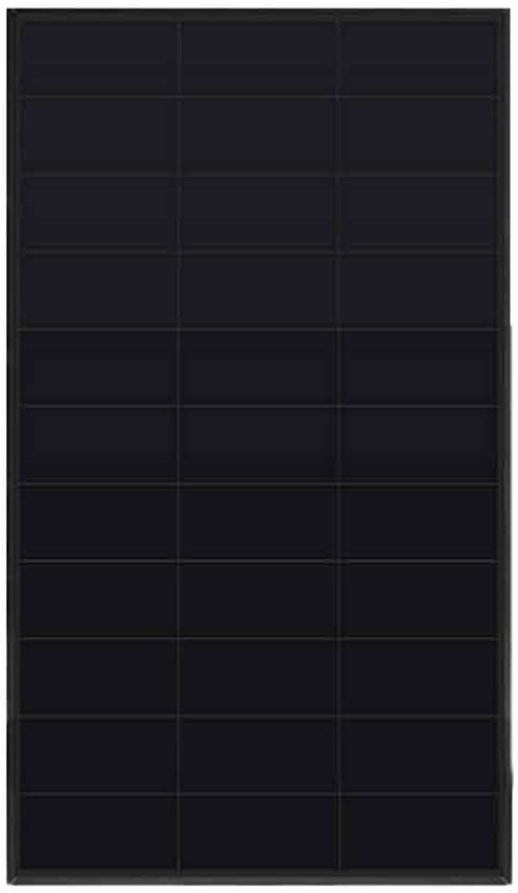

Mechanical Data Standard Test Conditions AM=1.5,E=1000W/m²,TC=25°C	
Nominal Power	130W
Cell Type	LONGI HPBC Mono-crystalline
Cell Efficiency	＞25%
Maximum Power Current (Impp)	6.40A
Maximum Power Voltage (Vmpp)	20.32V
Open-circuit Voltage (Voc)	23.20V
Short-circuit Current (Isc)	6.79A
Maximum System Voltage	500V
Output Tolerance	0~+3%
Cable (MC4)	700mm/2.5mm²
Module Structure	Glass / Cell / EVA / Al Frame
Junction box rating	⩾IP67
Diode	√
Operating temperature range	-40°C~+80°C
Packaging	
Module Dimensions	805 x 760 x 30mm
Module Weight	6.6/7.5kg
Package	Single package
Pieces per Pallet	30 pcs
Gross Weight per Pallet	270kg
Pallet Dimensions	1200*1100*750mm