MITSUBA MOTIVE POWER

TT Series - Flooded Deep cycle batteries.

TT105 (6V225Ah)



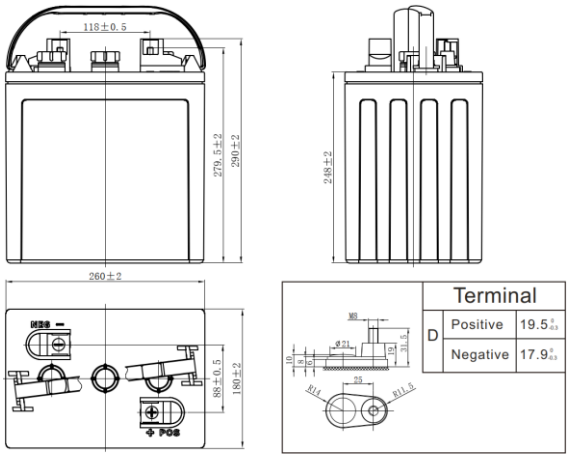

CHARACTERISTICS

Item	Specifications
Nominal Voltage	6V
Length	260mm (10.2inches)
Width	180mm (7.09inches)
Container Height	248mm (9.76inches)
Total Height	279.5mm (11.0inches)
Approx Weight	28.6kg (63.1lbs)
Terminal	8V240
Container Material	PP
Rated Capacity / 20HR	225Ah
Rated Capacity / 5HR	185Ah
Reserve Capacity / 25A	445min
Reserve Capacity / 75A	115min

GENERAL FEATURES

- Long cycle service life, strong recovery ability of deep discharge
- Low risk of thermal runaway, easy maintenance
- High energy, low internal resistance, low self-discharge
- Reliable sealing structure ensures no leakage during use
- Special design and structure increase battery performance
- The special alloy improves the corrosion resistance of the plate increases the service life and good deep discharge performance

APPLICATIONS

- Electric vehicle
- Golf cart
- Sightseeing bus
- Cleaning equipment
- AWP
- Marine&RV

Charging Characteristics

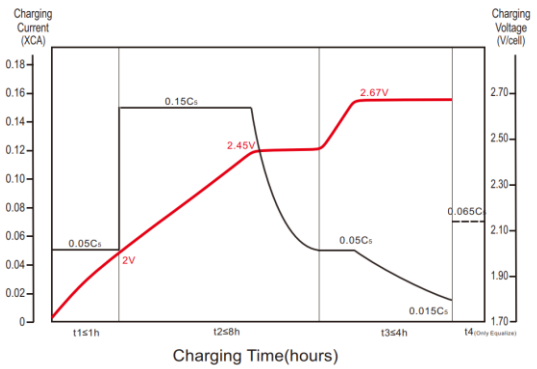

Discharge Characteristics

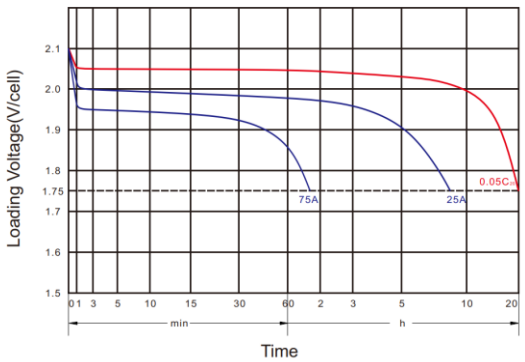

**Values are subject to variation of +/- 5% in normal manufacturing processes.*

Designed in compliance with applicable BCI standard.
Tested in compliance to BCI standard.

Leoch International Technology Ltd.
www.leoch.com