


- + POWERFUL N-TYPE TOPCON CELLS
- + GLASS-GLASS: HIGHER MECHANICAL STABILITY AND FIRE SAFETY
- + BIFACIAL: DOUBLE-SIDED POWER GENERATION FOR MORE YIELD
- + REDUCTION OF BALANCE-OF-SYSTEM-COSTS THROUGH HIGHER PERFORMANCE PER MODULE
- + APPLICATION: WHEREVER LONGEVITY AND ROBUSTNESS ARE REQUIRED



product guarantee<sup>1</sup>



linear performance guarantee<sup>1</sup>

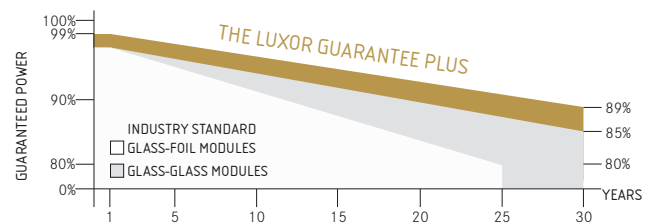

## ECO LINE N-TYPE TOPCON GLASS-GLASS BIF

### M108 / 410 - 430W

#### MONOCRYSTALLINE MODULE FAMILY, TRANSPARENT



Longlife tested



Power proofed



Safety provided




Selection of components



Back glass



Performance surplus of 0 Wp to 6.49 Wp



Higher heat dispensing



PID free LID Free



German warrantor

# ECO LINE N-TYPE TOPCON GLASS-GLASS BIFACIAL

## M108 / 410 - 430 W , TRANSPARENT, BLACK FRAME

Module type LX - XXX M/182-108+ GG | XXX = Rated power Pmpp

### Electrical data at STC

Rated power Pmpp [Wp]	410.00	415.00	420.00	425.00	430.00
Pmpp range to	416.49	421.49	426.49	431.49	436.49
Rated current Impp [A]	13.20	13.28	13.36	13.44	13.52
Rated voltage Vmpp [V]	31.08	31.27	31.46	31.65	31.84
Short-circuit current Isc [A]	13.92	14.01	14.09	14.18	14.26
Open-circuit voltage Uoc [V]	37.63	37.86	38.09	38.32	38.55
Efficiency at STC up to	21.33%	21.58%	21.84%	22.10%	22.35%
Efficiency at 200 W/m <sup>2</sup>	20.78%	21.04%	21.30%	21.55%	21.81%

### Electrical data at NOCT

Power at Pmpp [Wp]	308.32	312.08	315.84	319.60	323.36
Rated current Impp [A]	10.66	10.72	10.78	10.85	10.91
Rated voltage Vmpp [V]	28.92	29.11	29.30	29.46	29.64
Short-circuit current Isc [A]	11.24	11.31	11.37	11.45	11.51
Open-circuit voltage Uoc [V]	34.73	34.96	35.18	35.40	35.63

Specification as per STC (Standard test conditions): irradiance 1000W/m<sup>2</sup> | module temperature 25°C | Air Mass = 1.5  
 NOCT (nominal operating cell temperature): irradiance 800W/m<sup>2</sup> | wind speed 1m/sec | ambient temperature 20°C | cell operating temperature 45 +/- 2°C | Air Mass = 1.5

### Bifacial Gain\* (e.g. 415 Wp)

Backside power gain [Wp]	5%	10%	15%	20%	25%
Rated power Pmpp [Wp]	435.75	456.50	477.25	498.00	518.75
Rated current Impp [A]	13.94	14.60	15.26	15.92	16.58
Rated voltage Vmpp [V]	31.27	31.27	31.27	31.28	31.28
Short-circuit current Isc [A]	14.71	15.41	16.11	16.81	17.51
Open-circuit voltage Uoc [V]	37.86	37.86	37.86	37.87	37.87

\*depending on the reflection of the underlying surface

### Limiting values

Max. system voltage   max. return current	1000 V or 1500 V   30 A
Safety class   Fire safety class	II   C (according to IEC 61730)
Operating Temperature	-40 up to 85°C
Max. tested pressure load-/tensile <sup>2</sup>	5400 Pa / 2400 Pa

### Temperature coefficient

Temperature coefficient [U]   [I]   [P]	-0.25 % /°C   0.045 % /°C   -0.30 % /°C
---	---

### Specifications


Cells (matrix)   Type	108 (6 x 18)   M10, Half Cell   N-Type TOPCon
Module dimensions (L x W x H) <sup>3</sup>   Weight	1722 mm x 1134 mm x 30 mm   24 kg
Bifaciality factor <sup>5</sup>   Transparency	Up to 83 %   approx. 7%
Front-side glass	2 mm highly transparent, anti-reflection solar glass
Back-side	2 mm tempered, highly transparent solar glass
Frame	Stable, anodised aluminium frame
Embedding material	POE / EVA
Junction Box   Diodes	At least IP67   3 Schottky Diodes
Cable	Symmetrical cable lengths > 1.1 m, 4 mm <sup>2</sup> solar cable
Connectors	MC4 or equivalent with IP67
Hail test (max. hailstorm)	45mm   impact velocity 23 m/s ± 83 km/h

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance depending on equipment: rated power +/- 3%, other values +/- 10%. All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals.

- The specific warranty conditions are given under [www.luxor.solar/downloads.html](http://www.luxor.solar/downloads.html)
- Horizontal mounted, for details please check mounting instruction
- Tolerance L/W = +/- 3 mm, H +/- 2 mm, the dimensions given in the order confirmation will be decisive
- Frame drawing, location and dimensions of holes on request
- N-Type Topcon bifaciality factor 80 % +/- 3 %


Luxor, your specialised company

### Back - / Frontview<sup>3,4</sup>

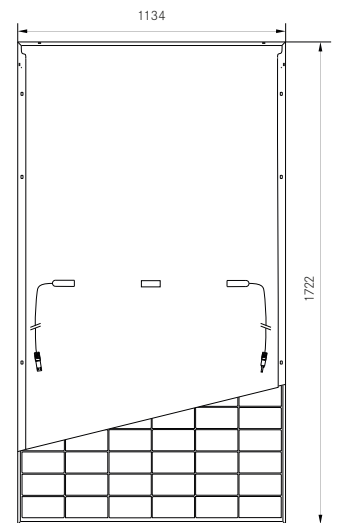


### Electrical characteristics

UI - diagram e.g. 420Wp

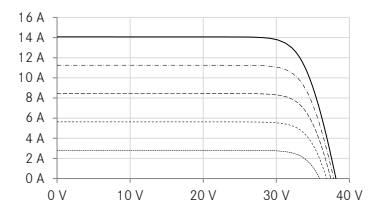

UP - diagram e.g. 420 Wp

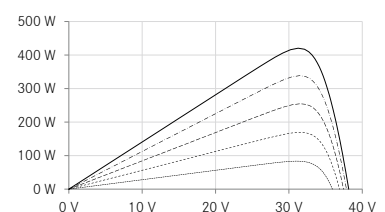

Guidelines:  
 93/68/EEC  
 2014/35/EU, (LVD)  
 2014/30/EU, (EMC)

The validity of the certificates/listings for a specific country has to be examined under:  
[www.luxor.solar/downloads.html](http://www.luxor.solar/downloads.html)